


Packaging Content:

1	Wooden shelf (bottom)	3	Pieces
2	Wooden shelf (right-left)	2	Pieces
3	Centering pin	16	Pieces
4	Dowel	8	Pieces
5	Lampshade head (De-mounted)	1	Piece
5-1	Subframe (Disassembled)	2	Pieces
5-2	Upper frame (Disassembled)	2	Pieces
5-3	Lampshade head cover (De-assembled)	1	Piece
6	Wooden shelf (top)	1	Piece
7	Socket nut	1	Piece
8	Holder and raising bar	1	Piece
9	Lock bolt	8	Pieces
10	Locking nut	8	Pieces
11	Elevation nut	1	Piece


1

Assembly Instruction;


- 1) Please confirm with the number and content information of the parts coming out of the product packaging.
- 2) Place the part numbered "4" into the appropriate holes on the part numbered "2". (May require light force)



- 3) Fix the part numbered "11" with the help of screwdriver and drill to the fixed parts numbered "4".




- 4) Place the parts numbered "3" in the appropriate places on the part numbered "2". (No force required)




2

- 5) Side wall parts (no. 2) with pins and dowels are combined with lower and upper (no.1) wooden shelves.
- 6) The joined parts are locked with the lock nut (number 10).




- 7) The joined parts are locked with the lock nut (number 10). Place the nut numbered "11" on the screw part at the bottom with the help of a wrench clockwise.




3

- 8) Let's assemble the lampshade cap according to the following explanation.

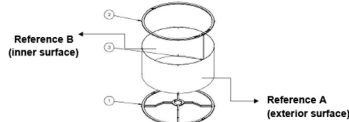


With the "Reference A" surface of part "5-3" facing outwards, Combine as in the pictures.

Figure A



After bringing the piece "5-3" to the stage in "figure A", the ring made from the inside locked by the locking mechanism.


Figure B

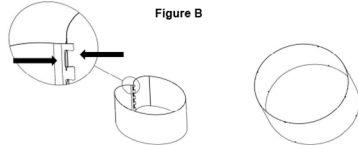


4

The part "5-2" is locked from the double-sided locking mechanism as in "Figure C".

Figure C

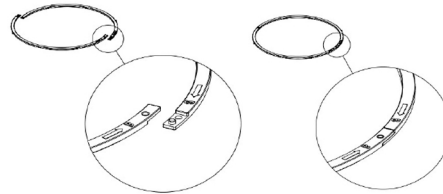


The part "5-3" is locked from the double-sided locking mechanism as in "Figure D".

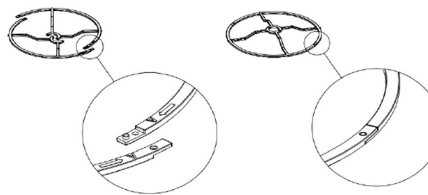


5

The assembled "5-2" and "5-1" parts are mounted through the "5-3" holes.

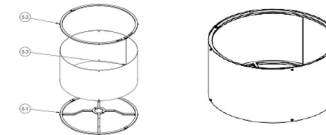

After the "5" part is mounted to the "8" part, the "7" part is "8". It is mounted by screwing to the part.

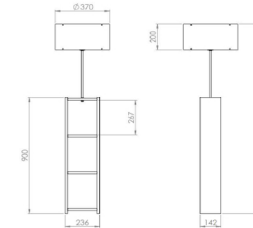

- 9) Insert the bulb and fix the plug to the 220 V socket inlet and prepare it for use.
- 10) To illuminate, turn the switch on the cable to the "ON" position.

6

