




**LEFT  
SIDE**

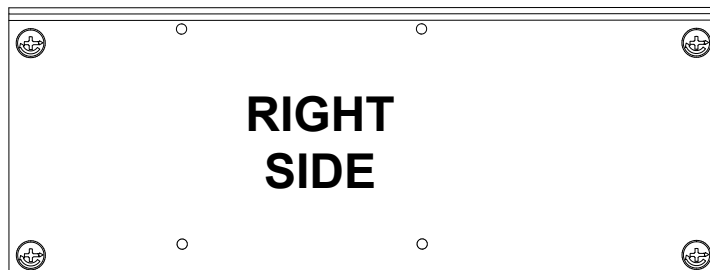


**RIGHT  
SIDE**

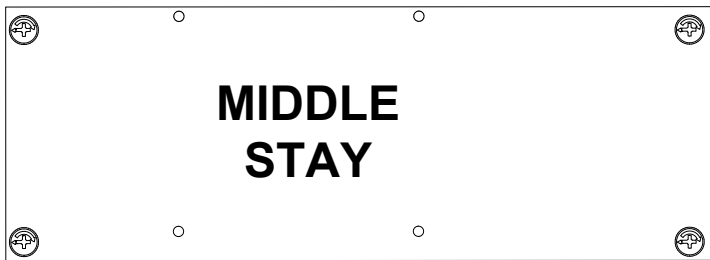


**MIDDLE  
STAY**

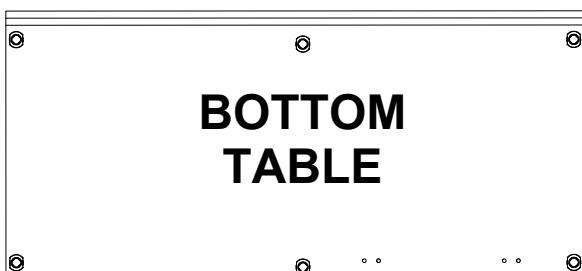


**BOTTOM  
TABLE**





**FIXED  
RAF**

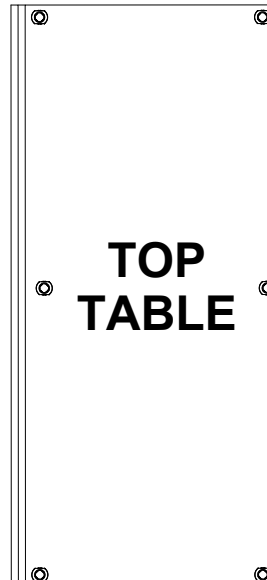


**TOP  
TABLE**




**MOBILE  
SHELF  
3x**

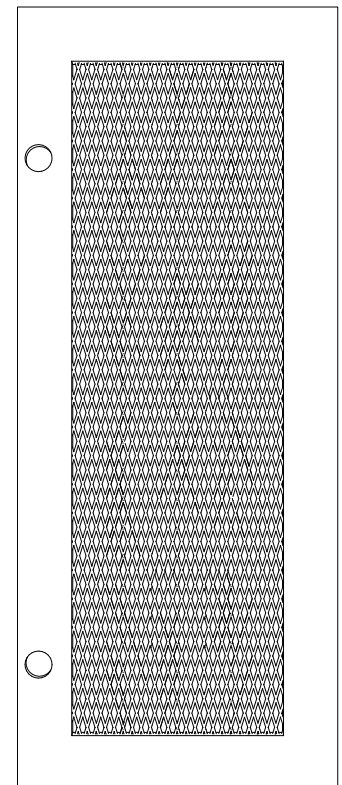


## ACCESSORY LIST



**3,5x18 SCREW**




**RAF PIN**




**MINI FIX SHAFT**



**MINI FIX  
SOMONU**






**FULL  
CAMEL  
HINGE**



**WOOD  
FOOT**


1

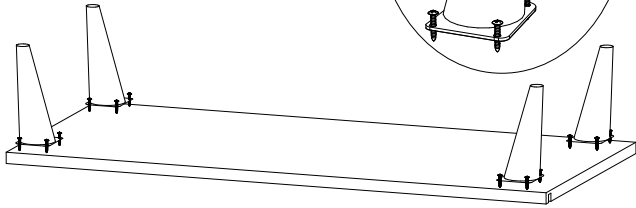



Mount the feet on the guide marks as shown in the illustration.



2





Insert the minifix pins into the previously prepared guide holes and secure them in place.

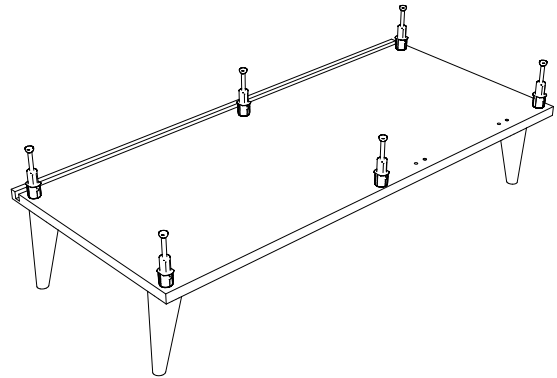

8 Pieces

3


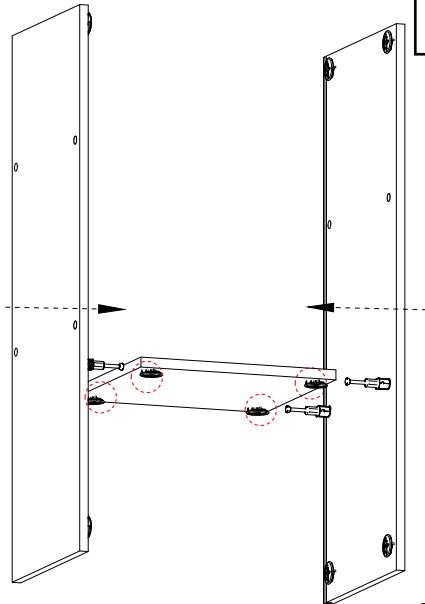



Place the center bracket, fixed shelf, and right side minifix pins in place and secure by tightening the minifix nuts.



4 Pieces

4

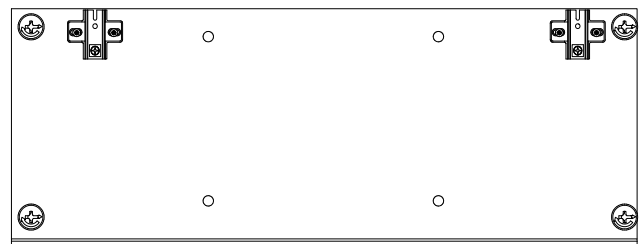



Left side  
Secure the hinges onto the guide lines prepared for the hinges.



3,5x18 screw

5


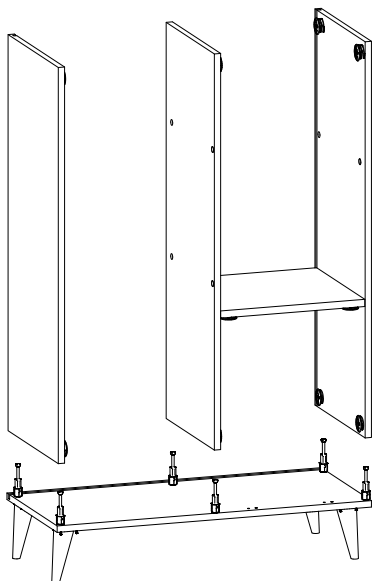



Place the right and left sides on the minifix pins and secure them by tightening the Minifix nut.






6 Pieces

6

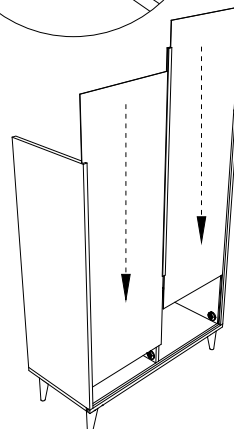

Place the backrests in the channels. Then place the H-profile and secure it with the backrest fastener.







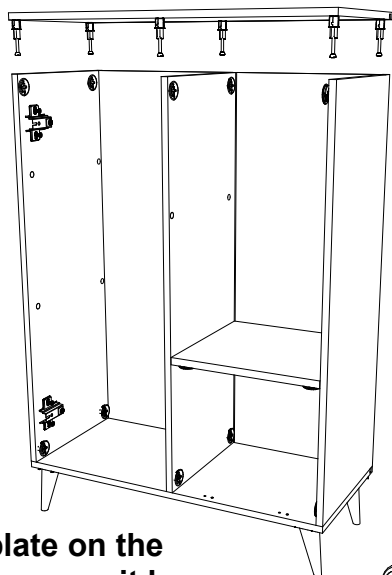


Place the top plate on the minifix pins and secure it by tightening the minifix nut.

6 Pieces

Before installing the mobile shelf  
Mount the shelf pins onto the slots as shown in the image.

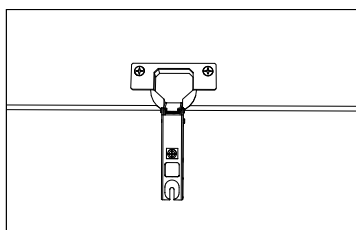
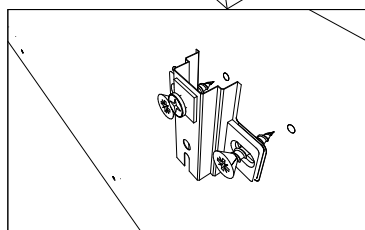
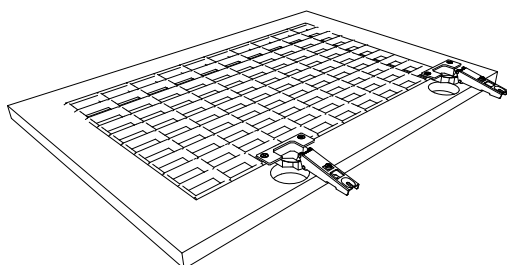
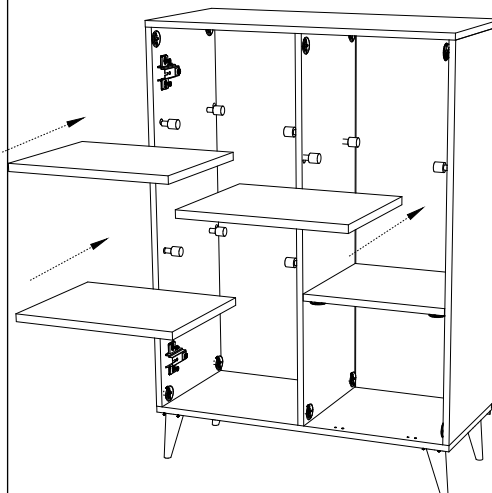


Mount the hinge counterparts on the rails as shown in the illustration. Position and secure the hinges as shown in the illustration.

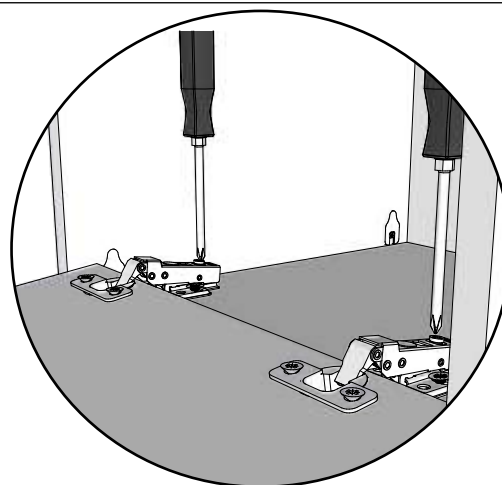

Place the hinges as shown in the image and secure them in place.

You can adjust the asymmetrical position between the covers by loosening the screw, positioning it as desired, and then tightening it.



You can adjust the asymmetrical position between the covers by loosening the screw, positioning it as desired, and then tightening it.

If you are satisfied with our service, you can honor us with positive ratings and comments, and contribute to other customers shopping with us.